

# L Series Built-In Double Ovens

Electronic controls hide behind a stainless steel panel. A motor quietly rotates the control panel into position. Both ovens of the Wolf L Series built-in double oven feature the Wolf dual convection system. It delivers even temperature and airflow throughout the oven. Two fans and four heating elements operate either simultaneously or in sequence, depending on which one of the ten different cooking modes you choose.



### **Features**

- Framed and unframed door styles in classic stainless steel finish—unframed door style also available in platinum and carbon finishes
- Dual convection logic control system
- Ten cooking modes—bake, roast, broil, convection bake, convection roast, convection broil, convection, bake stone (accessory required), dehydrate (accessory required) and proof in each oven
- Rotating glass touch control panel
- Cobalt blue porcelain oven interiors
- Three removable racks with full-extension bottom rack and removable six-level rack guide in each oven
- Large viewing triple-pane windows
- Dual interior halogen lighting
- Hidden bake element and recessed broil element in each oven
- Temperature probe and receptacle in each oven
- Self-clean, delayed start and Sabbath feature in each oven
- Door hinge with hydraulic damper assures smooth opening and closing of the door



Classic







Carbon

Model Options	DO30F/S	DO30U/S	DO30U/P	DO30U/B
Door Style	Framed	Unframed	Unframed	Unframed
Stainless Steel Finish	Classic	Classic	Platinum	Carbon

## Accessories

- Bake stone accessory, includes stone, rack and peel
- Two-piece broiler pan and temperature probe
- Set of three 30" oven racks
- Dehydration racks with door stop

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.



Model DO30F Framed Door Style



Model DO30U Unframed Door Style

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



Rotating Glass Touch Control Panel



# L Series Built-In Double Ovens

# RIGHT SIDE VIEW TOP VIEW TOP VIEW 17/8" (48) 17/8" (48) 17/8" (48) 17/8" (1270) 17/8" (48) 17/8" (48) 17/8" (1232) (1232) (1232) (1232) (1332) (1232) (1232) (1332) (1232) (1332) (1232) (1232) (1332) (1332) (148) OPEN OVEN DOOR 20<sup>3</sup>/<sub>4</sub>" (527) 28" (711) DEBHIND FRAME

Unit dimensions may vary by  $\pm 1/8$ ".

**Overall Dimensions** 


# **Specifications**

Overall Width	29 <sup>7</sup> /8"			
Overall Height	50"			
Overall Depth	24"			
Oven Door Clearance	203/4"			
Overall Oven Interior Capa (per oven)	acity 4.5 cu ft			
Oven Interior Dimensions (per oven) 25" W x 16 <sup>1</sup> / <sub>2</sub> " H x 19" D				
Recommended Cabinet Width 33				
Minimum Cabinet Width	30"			
Minimum Cabinet Depth	24"			
Minimum Base Support	400 lbs			
Opening Width	281/2"			
Opening Height	49 <sup>5</sup> /8"			
Electrical Requirements 60	240/208 V AC Hz, 50 amp circuit			
Conduit	5' flexible 4-wire			
Electrical Rating	8.9 kW at 240 V 6.7 kW at 208 V			
Total Amps	37			
Shipping Weight	466 lbs			

# **Installation Notes**

Complete installation specifications can be found on our website, wolfappliance.com.

# **Installation Specifications**

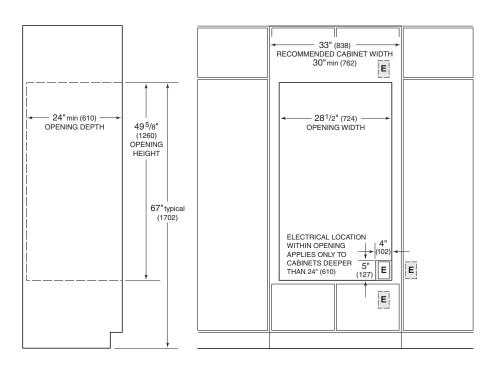

IMPORTANT NOTE: Unless you are using cabinets deeper than 24", it is recommended that the electrical supply be placed in an adjacent cabinet within reach of the conduit. Choose the location shown in the illustration that best suits your installation.

Dimensions in parentheses are in millimeters unless otherwise specified.